

OPERATION AND MAINTENANCE GUIDES

O&M For:	EI1125000
Date:	June 2024
Code:	EI1125000
Description:	ENDURO Industrial Tank 25,000 Ltr - South Island
Product Warranty:	10 years

SPECIFICATIONS


	Capacity (L)	Diameter (mm)	Height (mm)	Outlets	Manhole Dia (mm)
	25,000	3750	2820	2 x50	610
Standard	Complies with: <ul style="list-style-type: none">• AS/NZS 4020: Products in contact with drinking water• AS/NZS 2070 (INT): Plastics material for food contact use• Certified to AS/NZS 4766:2006: Water & Chemical Tank Standard				
Uses	<ul style="list-style-type: none">• Potable Water Storage• Retention/Detention Stormwater Management• Industrial Applications				
Statement	In line with today's focus on Ecologically Sustained Development, Green Building Initiatives and 5 Star Ratings, Promax is committed to supplying quality Liquid Storage and Handling Solutions. Promax Plastics confirms that if these tanks are installed according to Good Management practices set out in the Promax Installation Guides, they will perform as stated throughout their intended life.				

MAINTENANCE

Description	Action	Frequency
Tank Stability	Tank must remain level, foundation must not become eroded	Monthly
Tank Lid	Remains securely fitted	Bi-Monthly
Inlet/Outlet Fitting	Remains securely fitted with no leakage	Bi-Monthly
Pump	Check Pump, if fitted, for inlet screen blockages	Bi-Monthly
Sediment Build Up	Remains lower than base outlet - if outlet flow becomes restricted remove sediment with vacuum truck. Re-attach tank lid securely.	Half yearly or as necessary

Please note: Entry into this tank is at owners risk.

Authorised By:
Promax Engineered Plastics Limited
PO Box 749, Kerikeri 0245, New Zealand
T: 0800 77 66 29
E: sales@promax.co.nz

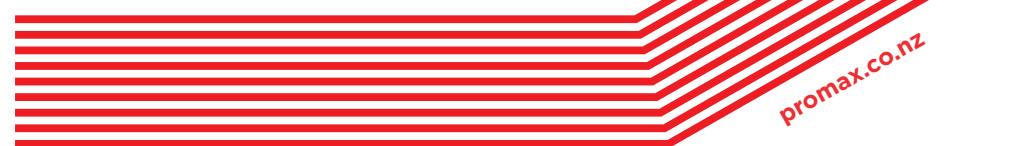

OPERATION AND MAINTENANCE GUIDES



Responsibility:

The owner/s are responsible for maintenance of the tank.

**Post Storm
Inspection:**

Following a storm event it is recommended that a full tank inspection is carried out, please refer the maintenance section for guidelines on this.

**Debris removal
programme:**

If debris is identified in either a regular maintenance check or post storm inspection it is recommended that this is removed by a professional stormwater maintenance provider.

MAINTENANCE RECORDS

Date	Comments	Completed

